

ELECTRIC

ELECTRIC PUMP HYFLOW SERIES



Model	Hyflow-2 220V/380V	Hyflow-4 220V/380V
OPERATING WRENCHES	2	4
TANK CAPACITY	5.5 L	5.5 L
FLOW (LOW-MID-HIGH)	7 - 1.6 - 0.8 L/min	7 - 1.6 - 0.8 L/min
OUTPUT PRESSURE	70-700 bar (1,000-10,000 psi)	70-700 bar (1,000-10,000 psi)
POWER SOURCE	220V / 50 Hz	220V / 50 Hz
MOTOR POWER	1.1 kW	1.1 kW
WEIGHT	25 kg	27 kg
DIMENSIONS	419 × 295 × 464 mm	419 × 295 × 464 mm

- Compact, automatic **three-stage** design.
- Aluminum oil tank with level gauge.
- Infinitely variable pressure, **70-700 bar**.
- Motor available for different voltages.
- Runs **one or two wrenches** simultaneously.
- **Ø100 mm (4")** high-pressure gauge.
- High-efficiency cooler for **24/7 operation**.
- Optional **FP4 manifold** runs four wrenches.

AIR PUMP HYFLOW AIR SERIES



PNEUMATIC

Model	Hyflow-2 Air	Hyflow-4 Air
OPERATING WRENCHES	2	4
WORKING PRESSURE	700 bar (10,000 psi)	700 bar (10,000 psi)
AIR SUPPLY (INPUT)	4-8 bar (58-116 psi)	4-8 bar (58-116 psi)
POWER	3.0 kW	3.0 kW
TANK CAPACITY	5.5 L	5.5 L
FLOW (LOW-MID-HIGH)	8.6 - 2.2 - 1.1 L/min	8.6 - 2.2 - 1.1 L/min
OIL COOLER	N/A	N/A
WEIGHT	22 kg	24 kg
OIL OUTLETS	4 × 1/4" NPT	8 × 1/4" NPT
DIMENSIONS	419 × 295 × 464 mm	419 × 295 × 464 mm

- Compact **three-stage** pump with air drive.
- Steel roll frame built for continuous duty.
- Variable pressure adjustment, **70-700 bar**.
- Single valve block replaceable with **FP4** to run 2 or 4 tools.
- **4" (100 mm)** gauge; aluminum tank with level indicator.
- Designed for **continuous operation**.



DIMENSIONS

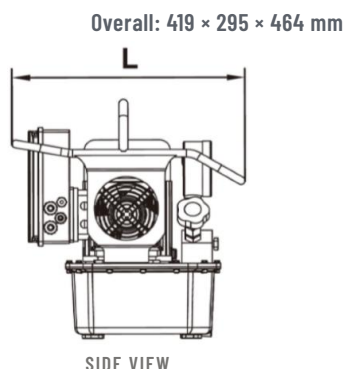

Overall: 419 × 295 × 464 mm

CUSTOM REMOTE CABLE

TORC can supply the remote control cable in any length to suit your job site. **Ask our team** for a custom configuration.

6 m STANDARD CABLE · 20 FT