

LOCKING COUPLER

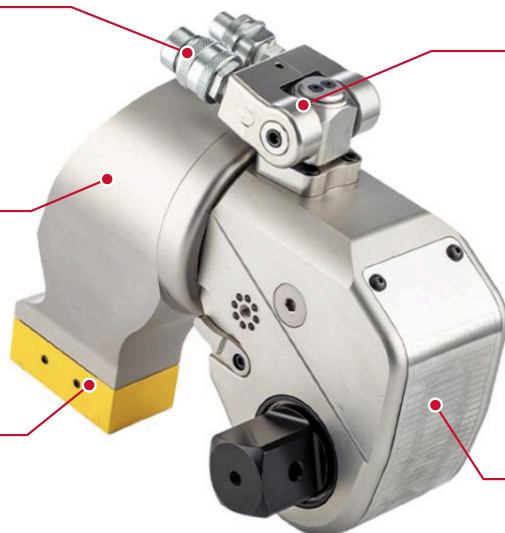
New locking coupler keeps oil flowing freely.

COMPACT HOUSING

Advanced aluminum-titanium alloy body for outstanding strength and toughness.

360° REACTION ARM

Adjustable in a full circle to brace against any reaction point.


360° × 185° SWIVEL

Rotates freely for operation in tight spaces.

LASER-ETCHED CHART

Pressure-to-torque chart right on the tool for fast, easy setup.

KEY FEATURES

- 10,000 psi (700 bar) max working pressure with accuracy within $\pm 3\%$.
- 12 models from 112 to 98,900 N·m — covering most bolt sizes in one of the most comprehensive lines available.
- 360° × 185° swivel manifold operates freely with no space restrictions.
- Square drive accepts heavy-duty impact sockets for a wide range of bolt sizes.
- 360° adjustable reaction arm braces against any support point.
- Compact, high-strength aluminum-titanium alloy housing.
- New locking coupler ensures free oil flow.

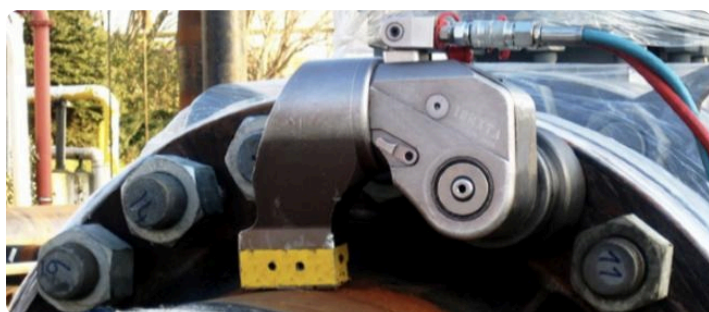
$\pm 3\%$
ACCURACY

700 bar
MAX PRESSURE

12
MODELS

TTX SERIES SELECTION CHART

TYPE	TTX0	TTX1	TTX3	TTX5	TTX7	TTX11	TTX15	TTX21	TTX25	TTX35	TTX50	TTX60
TORQUE N·m	112-1,120	179-1,795	451-4,512	752-7,528	1,078-10,780	1,551-15,516	2,041-20,418	2,666-26,664	3,472-34,725	4,866-48,666	7,200-72,000	9,890-98,900
BOLT SIZE Metric (M)	14-30	16-36	22-48	27-56	30-64	36-72	39-80	42-90	48-100	64-120	72-125	80-130
WEIGHT kg	1.8	2.5	5	8	11	15	23	26.5	35	50	87	120
SQUARE DRIVE in.	3/4"	3/4"	1"	1-1/2"	1-1/2"	1-1/2"	2-1/2"	2-1/2"	2-1/2"	2-1/2"	2-1/2"	3-1/2"

INDUSTRIAL APPLICATIONS


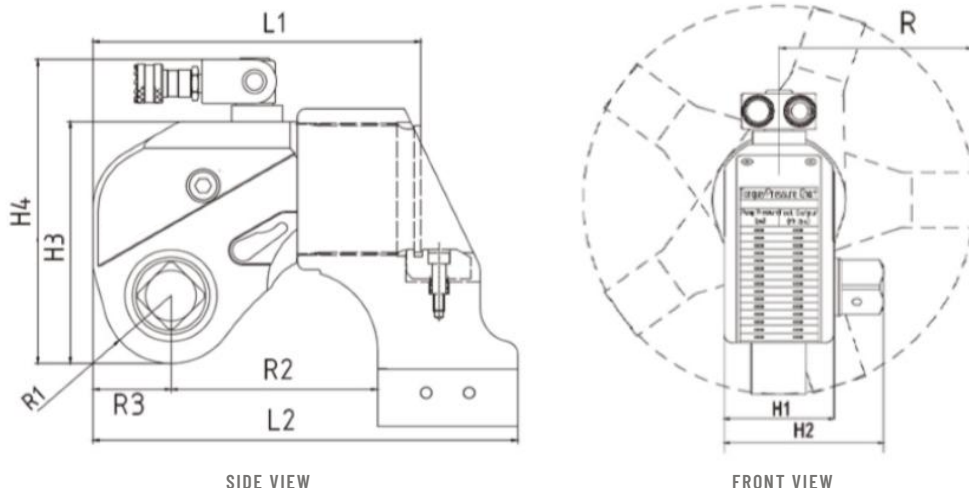
PROFESSIONAL-GRADE HYDRAULIC TORQUE

The TTX Series is TORC's professional hydraulic torque wrench line. Its aluminum-titanium alloy housing keeps the tool light while delivering exceptional strength.

With 12 models spanning 112 to 98,900 N·m, the TTX Series covers most bolt sizes and ranks among the most comprehensive lines on the market. TORC backs every tool with worldwide after-sales service, and the series is TÜV certified.

12 MODELS 112-98,900 N·M

TÜV CERTIFIED



TTX DIMENSION CHART

All dimensions in mm

TYPE	L1	L2	H1	H2	H3	H4	R	R1	R2	R3
TTX0	110.8	139.3	42	65.8	76.2	108.1	75	20.5	68.8	25
TTX1	144	174	50	72	95.5	131	91.5	26	85.5	29
TTX3	178	229	68	95	127	176.5	123.5	34	114	40
TTX5	210.5	270.5	80	123	149	199	140	39	138	46.5
TTX7	222	295	90	134	167	217	165	47	155	47
TTX11	245.5	318.8	100	142	182	232	178	51	155.3	58.5
TTX15	292.8	361.3	112	167.4	206	252.4	188.5	56	177.7	67.1
TTX21	307.5	384.3	120	183	220	270	213	59	186	71
TTX25	323	402	137	200	247	297	228	66	199.8	72
TTX35	372.5	496.5	153	216	282	332	243.5	77	241.4	89.5
TTX50	400	516	160	223	290.5	341	258	81	258.5	97.5
TTX60	453.3	573.4	180	256	336	386.6	279	95	284.9	114.5

ACCESSORIES

Heavy-duty impact sockets and reaction arms available. Need a special reaction arm? **Contact TORC** for a custom solution.

